

UNCLASSIFIED

---

AD **297 060**

*Reproduced  
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA



---

UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

N-63-2-5



CATALOGED BY ASTIA  
AS AD NO.

MECHANICAL

NOLOGY

INCORPORATED

297 060

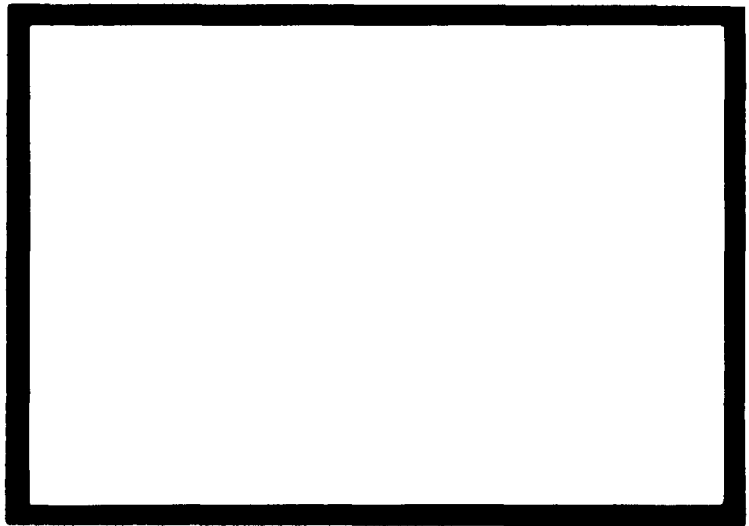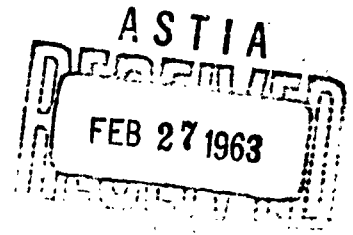

**MTI-63TR4**

**STATIC AND DYNAMIC FORCES OF  
PARTIAL ARC SELF-ACTING GAS JOURNAL BEARINGS  
AT MODERATE COMPRESSIBILITY NUMBERS**

**by**

**R. J. Wernick & C. H. T. Pan**

**Contract Nonr 3730 (00)**

STATIC AND DYNAMIC FORCES OF  
PARTIAL ARC SELF-ACTING GAS JOURNAL BEARINGS  
AT MODERATE COMPRESSIBILITY NUMBERS

by

R.J. Wernick & C.H.T. Pan

*R.J. Wernick C.H.T. Pan*

Author(s)

*Bern Sternlicht*

Approved by

*H. Aptarian*

Approved by

Prepared under

Contract Nonr 3730 (00)

Supported by

DEPARTMENT OF DEFENSE  
ATOMIC ENERGY COMMISSION  
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Administered by

OFFICE OF NAVAL RESEARCH  
Department of the Navy

Reproduction in Whole or in Part is Permitted  
for any PURPOSE of the U.S. Government

MECHANICAL TECHNOLOGY INCORPORATED  
Latham, N. Y.

## TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION .....	1
DERIVATION OF EQUATIONS TO BE SOLVED .....	2
SOLUTION BY GALERKIN'S METHOD .....	9
CALCULATION OF FORCES .....	13
EXTRAPOLATION PROCEDURE .....	14
SAMPLE RESULTS .....	16
CONCLUSIONS .....	18
RECOMMENDATIONS .....	19
REFERENCES .....	20
FIGURE	

## I. INTRODUCTION

Partial arc self-acting bearing pads are often used to overcome rotor-bearing instability. In such applications, depending on the specific design requirements, the bearing may be constructed either of a single fixed pad, of several fixed pads (multi-lobe bearing), or of several pivoted or flexibly supported shoes. The vital design information consists of both the static and time dependent fluid film forces of each pad, which ultimately determines the load carrying capacity of the bearing and the stability characteristics of the rotor-bearing system.

An important application of the partial-arc type bearings is the self-acting gas journal bearings operating in a high ambient pressure. Here the lateral unit load on the journal bearings is extremely small so that <sup>\*</sup>Half-Frequency Whirl instability is likely to occur for plain cylindrical journal bearings. Under this condition, the bearing compressibility number,  $\Lambda$ , is always very small, thus, it is convenient to solve the lubrication problem by an expansion of the fluid film pressure in terms of a power series in  $\Lambda$  [6]. The first order effect of this expansion actually gives the same equation applicable to an incompressible lubricant. The higher order effects are concerned with equations of increasing complexity, but are nevertheless all linear.

Solution of these equations is no simple matter because of the variable coefficients. Tanner [1] has applied the method of Galerkin to solve the steady state Reynolds equation for a variety of bearing configurations. The present paper extends this method to consider both time-dependence and higher order effects of  $\Lambda$ . Under the assumptions made herein, the results also may be applied to the calculation of critical speed, rotor response [7], as well as the stability of flexible rotors.

---

\*Half-Frequency Whirl - A special case of instability generally associated with self-acting journal bearings. This instability occurs when the journal speed reaches a critical value. The journal axis whirls at a frequency of one-half or nearly one-half of the journal speed in the same direction as the journal rotation. The motion of the journal of the journal axis can be either conical or cylindrical.

## II. DERIVATION OF EQUATIONS TO BE SOLVED

The object of this section is to obtain the Reynolds equation in the form

$$L \{u\} = f,$$

where  $L$  is a linear operator,  $f$  is known function and  $u$  is the desired solution. We may then obtain our solution by Galerkin's method. Thus, we consider the nondimensional Reynolds equation

$$L \{p^2\} = \left\{ \frac{\partial}{\partial \theta} \left[ h^3 \frac{\partial}{\partial \theta} \right] + \frac{\partial}{\partial z} \left[ h^3 \frac{\partial}{\partial z} \right] \right\} \{p^2\} = 2\Lambda \left[ \frac{\partial}{\partial \theta} (hp) + 2 \frac{\partial}{\partial t} (hp) \right],$$

$$p^2 \left( \pm \frac{\beta}{2}, z \right) = p^2 (\theta, \pm L/D) = 1. \quad (1)$$

We make the following three assumptions:

(I)  $\Lambda$  is small (i.e., may be used as a perturbation parameter),

(II)  $p$  does not depend on time explicitly; i.e.,

$$\frac{\partial p}{\partial t} = \frac{\partial p}{\partial \epsilon} \dot{\epsilon} + \frac{\partial p}{\partial \dot{\epsilon}} \ddot{\epsilon} + \dots + \frac{\partial p}{\partial \alpha} \dot{\alpha} + \frac{\partial p}{\partial \dot{\alpha}} \ddot{\alpha} + \dots$$

(III) Time derivatives (e.g.,  $\dot{\epsilon}, \dot{\alpha}, \ddot{\epsilon}, \ddot{\alpha}$ ) are small enough so as to make their products negligible.

Then, using Assumption (I), we write

$$p(\theta, z) = \sum_{k=0}^{\infty} \Lambda^k p^{(k)}, \quad (2)$$

where

$$p^{(0)} \equiv 1.$$

Thus,

$$p^2(\theta, z) = \sum_{k=0}^{\infty} \Lambda^k \sum_{j=0}^k p^{(j)} p^{(k-j)} \quad (3)$$

Substitution of (2) and (3) in (1) gives

$$\begin{aligned} L \{p^2\} &= \left\{ \frac{\partial}{\partial \theta} \left[ h^3 \frac{\partial}{\partial \theta} \right] + \frac{\partial}{\partial z} \left[ h^3 \frac{\partial}{\partial z} \right] \right\} \left\{ \sum_{k=0}^{\infty} \Lambda^k \left[ \sum_{j=0}^k p^{(j)} p^{(k-j)} \right] \right\} = \\ &= 2\Lambda \left\{ \frac{\partial}{\partial \theta} + 2 \frac{\partial}{\partial t} \right\} \left\{ h \sum_{k=0}^{\infty} \Lambda^k p^{(k)} \right\}, \end{aligned} \quad (4)$$

from which, equating like powers of  $\Lambda$ , we obtain

$$\begin{aligned} \sum_{j=0}^k L \left\{ p^{(j)} p^{(k-j)} \right\} &= \sum_{j=0}^k \left\{ \frac{\partial}{\partial \theta} \left[ h^3 \frac{\partial}{\partial \theta} (p^{(j)} p^{(k-j)}) \right] + \frac{\partial}{\partial z} \left[ h^3 \frac{\partial}{\partial z} (p^{(j)} p^{(k-j)}) \right] \right\} = \\ &= 2 \left\{ \frac{\partial}{\partial \theta} + 2 \frac{\partial}{\partial t} \right\} h p^{(k-1)}; \quad k = 1, 2, \dots \end{aligned} \quad (5)$$

Under Assumption (II) above, (5) becomes

$$\sum_{j=0}^k L \left\{ p^{(j)} p^{(k-j)} \right\} = 2 \left[ \frac{\partial}{\partial \theta} + 2 \sum_{r=1}^k (\epsilon [r] \frac{\partial}{\partial \epsilon [r-1]} + \alpha [r] \frac{\partial}{\partial \alpha [r-1]}) \right] (h p^{(k-1)}) \quad (6)$$

where

$$f [r] = d^r f / dt^r$$

$$k = 1, 2, \dots$$

We note then, that for  $k=1$ , since  $p^{(0)} \equiv 1$ , (6) becomes

$$L \left\{ p^{(1)} \right\} = \left\{ \frac{\partial}{\partial \theta} (h^3 \frac{\partial}{\partial \theta}) + \frac{\partial}{\partial z} (h^3 \frac{\partial}{\partial z}) \right\} \left\{ p^{(1)} \right\} = \frac{\partial h}{\partial \theta} + 2 \left[ \epsilon \frac{\partial h}{\partial \epsilon} + \alpha \frac{\partial h}{\partial \alpha} \right] . \quad (6a)$$

For  $k \geq 1$ , we transpose all terms containing  $p^{(l)}$ , with  $l < k$ , to the right side of the equation to obtain

$$\begin{aligned} L \left\{ p^{(k)} \right\} &= \left\{ \frac{\partial}{\partial \theta} + 2 \sum_{r=1}^k (\epsilon [r] \frac{\partial}{\partial \epsilon [r-1]} + \alpha [r] \frac{\partial}{\partial \alpha [r-1]}) \right\} \left\{ h p^{(k-1)} \right\} \\ &- \frac{1}{2} \sum_{j=1}^{k-1} L \left\{ p^{(j)} p^{(k-j)} \right\}, \quad k = 2, 3, \dots \end{aligned} \quad (7)$$

We now represent each perturbation pressure  $p^{(k)}$  as the sum of its steady state component and its time-dependent components in the form:

$$p^{(k)} = p_{00}^{(k)} + \sum_{r=1}^k (\epsilon [r] p_{r0}^{(k)} + \alpha [r] p_{0r}^{(k)}) , \quad k = 1, 2, \dots \quad (8)$$

(from (6a), we note that for  $k=1$ :

$$L \left\{ p_{00}^{(1)} \right\} = \frac{\partial h}{\partial \theta} ; L \left\{ p_{10}^{(1)} \right\} = 2 \frac{\partial h}{\partial \epsilon} ; L \left\{ p_{01}^{(1)} \right\} = 2 \frac{\partial h}{\partial \alpha} . \quad ) \quad (9)$$

Using (8) and Assumption (III), we may write

$$\begin{aligned}
 p^{(j)} p^{(k-j)} &= p_{00}^{(j)} p_{00}^{(k-j)} + p_{00}^{(k-j)} \sum_{r=1}^j (\epsilon [r] p_{r0}^{(j)} + \alpha [r] p_{0r}^{(j)}) \\
 &\quad + p_{00}^{(j)} \sum_{r=1}^{k-j} (\epsilon [r] p_{r0}^{(k-j)} + \alpha [r] p_{0r}^{(k-j)}), \quad (10)
 \end{aligned}$$

for

$$k = 2, 3, \dots,$$

$$j = 1, 2, \dots, k.$$

Then substitution of (8) and (10) in (7) yields

$$\begin{aligned}
 L \left\{ p_{00}^{(k)} + \sum_{r=1}^k (\epsilon [r] p_{r0}^{(k)} + \alpha [r] p_{0r}^{(k)}) \right\} &= \\
 &= \frac{\partial}{\partial \theta} \left[ h p_{00}^{(k-1)} + h \sum_{r=1}^{k-1} (\epsilon [r] p_{r0}^{(k-1)} + \alpha [r] p_{0r}^{(k-1)}) \right] + 2 \left[ \epsilon \frac{\partial}{\partial \epsilon} (h p_{00}^{(k-1)}) \right. \\
 &\quad \left. + \alpha \frac{\partial}{\partial \alpha} (h p_{00}^{(k-1)}) \right] + 2 \sum_{r=2}^k (\epsilon [r] h p_{r-1,0}^{(k-1)} + \alpha [r] h p_{0,r-1}^{(k-1)}) \\
 &\quad - \frac{1}{2} \sum_{j=1}^{k-1} L \left\{ p_{00}^{(j)} p_{00}^{(k-j)} \right\} - \frac{1}{2} \sum_{j=1}^{k-1} L \left\{ p_{00}^{(k-j)} \sum_{r=1}^j (\epsilon [r] p_{r0}^{(j)} + \alpha [r] p_{0r}^{(j)}) \right\} \\
 &\quad + L \left\{ p_{00}^{(j)} \sum_{r=1}^{k-j} (\epsilon [r] p_{r0}^{(k-j)} + \alpha [r] p_{0r}^{(k-j)}) \right\}, \quad (11)
 \end{aligned}$$

for  $k = 2, 3, \dots$ .

We note (from (1)) that  $L$  is linear; i.e.,  $L\{au + bv\} = aL\{u\} + bL\{v\}$ .

However,  $L$  acting on a product is given by

$$\begin{aligned}
 L\{uv\} &= uL\{v\} + vL\{u\} + 2h^3 \left( \frac{\partial u}{\partial \theta} \frac{\partial v}{\partial \theta} + \frac{\partial u}{\partial z} \frac{\partial v}{\partial z} \right) \\
 &= uL\{v\} + vL\{u\} + 2M(u, v) \quad (12)
 \end{aligned}$$

We also now define the "known" functions  $f(\theta, z)$  by

$$\begin{aligned}
 L\{p_{00}^{(k)}\} &= f_{00}^{(k)}, \\
 L\{p_{r0}^{(k)}\} &= f_{r0}^{(k)}, \\
 L\{p_{0r}^{(k)}\} &= f_{0r}^{(k)}, \quad r = 1, 2, \dots, k, \quad (13)
 \end{aligned}$$

noting that any  $p^{(j)}$  occurring in an expression for  $f^{(k)}$  has  $j < k$ .

#### A. Steady State Equations

Consideration of (11), and use of the relations (12) and (13) gives

$$\begin{aligned} L\{p_{00}^{(k)}\} = f_{00}^{(k)} = \frac{\partial}{\partial \theta} (hp_{00}^{(k-1)}) - \frac{1}{2} \sum_{j=1}^{k-1} (p_{00}^{(j)} f_{00}^{(k-j)} \\ + p_{00}^{(k-j)} f_{00}^{(j)} + 2M(p_{00}^{(j)}, p_{00}^{(k-j)}) , \end{aligned} \quad (14)$$

for  $k = 2, 3, \dots$

#### B. Time-Dependent Equations ( $k = 2, 3, \dots$ )

Again considering (11), matching like  $\epsilon$ - and  $\alpha$ - derivative terms, and using the relations (12) and (13) gives, after some manipulation:

$$\begin{aligned} L\{p_{10}^{(k)}\} = f_{10}^{(k)} = 2 \frac{\partial}{\partial \epsilon} (hp_{00}^{(k-1)}) + \frac{\partial}{\partial \theta} (hp_{10}^{(k-1)}) \\ - \sum_{r=1}^{k-1} p_{00}^{(r)} f_{10}^{(k-r)} + p_{10}^{(k-r)} f_{00}^{(r)} + 2M(p_{00}^{(r)}, p_{10}^{(k-r)}) \\ L\{p_{j0}^{(k)}\} = f_{j0}^{(k)} = 2hp_{j-1,0}^{(k-1)} + \frac{\partial}{\partial \theta} (hp_{j,0}^{(k-1)}) - \sum_{r=1}^{k-j} (p_{00}^{(r)} f_{j0}^{(k-r)} + p_{j0}^{(k-r)} f_{00}^{(r)} \\ + 2M(p_{00}^{(r)}, p_{j0}^{(k-r)}) , \quad j = 1, 2, 3, \dots, k-1 \end{aligned} \quad (15)$$

$$L\{p_{k0}^{(k)}\} = f_{k0}^{(k)} = 2hp_{k-1,0}^{(k-1)} ,$$

$$\begin{aligned} L\{p_{01}^{(k)}\} = f_{01}^{(k)} = 2 \frac{\partial}{\partial \alpha} (hp_{00}^{(k-1)}) + \frac{\partial}{\partial \theta} (hp_{01}^{(k-1)}) - \sum_{r=1}^{k-1} (p_{00}^{(r)} f_{01}^{(k-r)} \\ + p_{01}^{(k-r)} f_{00}^{(r)} + 2M(p_{00}^{(r)}, p_{01}^{(k-r)}) , \end{aligned}$$

$$\begin{aligned} L\{p_{0j}^{(k)}\} = f_{0j}^{(k)} = 2hp_{0,j-1}^{(k-1)} + \frac{\partial}{\partial \theta} (hp_{0,j}^{(k-1)}) - \sum_{r=1}^{k-j} (p_{00}^{(r)} f_{0j}^{(k-r)} + p_{0j}^{(k-r)} f_{00}^{(r)} \\ + 2M(p_{00}^{(r)}, p_{0j}^{(k-r)}) , \quad j = 2, 3, \dots, k-1, \end{aligned}$$

$$L\{p_{0k}^{(k)}\} = f_{0k}^{(k)} = 2hp_{0,k-1}^{(k-1)} .$$

### C. Static Stability Derivatives

We are also interested in obtaining equations for the derivatives of the steady state pressures with respect to  $\epsilon$  and  $\alpha$ . Therefore, we consider

$$L\{p_{00}^{(k)}\} = \frac{\partial}{\partial \theta} (h^3 \frac{\partial p_{00}^{(k)}}{\partial \theta}) + \frac{\partial}{\partial z} (h^3 \frac{\partial p_{00}^{(k)}}{\partial z}) = f_{00}^{(k)}.$$

We assume that:

- (1) All necessary derivatives exist, and
- (2)  $h$  is independent of  $z$ .

Then, differentiating the above expression by  $\epsilon$ , we obtain

$$L\left\{\frac{\partial p_{00}^{(k)}}{\partial \epsilon}\right\} = f_{\epsilon}^{(k)} = \frac{\partial f_{00}^{(k)}}{\partial \epsilon} - 3\left(\frac{1}{h} f_{00}^{(k)} - h \frac{\partial h}{\partial \theta} \frac{\partial p_{00}^{(k)}}{\partial \theta}\right) \frac{\partial h}{\partial \epsilon} - 3h^2 \frac{\partial p_{00}^{(k)}}{\partial \theta} \frac{\partial^2 h}{\partial \epsilon \partial \theta}. \quad (16)$$

Similarly, a differentiation by  $\alpha$  yields

$$L\left\{\frac{\partial p_{00}^{(k)}}{\partial \alpha}\right\} = f_{\alpha}^{(k)} = \frac{\partial f_{00}^{(k)}}{\partial \alpha} - 3\left(\frac{1}{h} f_{00}^{(k)} - h \frac{\partial h}{\partial \theta} \frac{\partial p_{00}^{(k)}}{\partial \theta}\right) \frac{\partial h}{\partial \alpha} - 3h^2 \frac{\partial p_{00}^{(k)}}{\partial \theta} \frac{\partial^2 h}{\partial \alpha \partial \theta}. \quad (17)$$

Thus, for any power  $k$  of the perturbation series (2) for  $p$ , we have obtained a set of partial differential equations for the steady state pressure, the time-dependent pressure components, and the derivatives of the steady-state pressure with respect to  $\epsilon$  and  $\alpha$  all of which are in the form

$$L\{u\} = f$$

suitable for numerical solution by the Galerkin method.

We summarize these below for  $k = 1$  and  $2$ .

$$\underline{k = 1:}$$

$$p^{(1)} = p_{00}^{(1)} + \dot{\epsilon} p_{10}^{(1)} + \dot{\alpha} p_{01}^{(1)},$$

where

$$L\{p_{00}^{(1)}\} = f_{00}^{(1)} = \frac{\partial h}{\partial \theta},$$

$$L \left\{ p_{10}^{(1)} \right\} = f_{10}^{(1)} = 2 \frac{\partial h}{\partial \epsilon},$$

$$L \left\{ p_{01}^{(1)} \right\} = f_{01}^{(1)} = 2 \frac{\partial h}{\partial \alpha}, \quad (9)$$

and

$$L \left\{ \frac{\partial p_{00}^{(1)}}{\partial \epsilon} \right\} = f_{\epsilon}^{(1)} = (1-3h^2 \frac{\partial p_{00}^{(1)}}{\partial \theta}) \frac{\partial^2 h}{\partial \epsilon \partial \theta} - \frac{3}{h} \frac{\partial h}{\partial \theta} \frac{\partial h}{\partial \epsilon} (1-h^2 \frac{\partial p_{00}^{(1)}}{\partial \theta}), \quad (18)$$

$$L \left\{ \frac{\partial p_{00}^{(1)}}{\partial \alpha} \right\} = f_{\alpha}^{(1)} = (1-3h^2 \frac{\partial p_{00}^{(1)}}{\partial \theta}) \frac{\partial^2 h}{\partial \alpha \partial \theta} - \frac{3}{h} \frac{\partial h}{\partial \theta} \frac{\partial h}{\partial \alpha} (1-h^2 \frac{\partial p_{00}^{(1)}}{\partial \theta}). \quad (19)$$

k = 2:

$$p^{(2)} = p_{00}^{(2)} + \dot{\epsilon} p_{10}^{(2)} + \ddot{\epsilon} p_{20}^{(2)} + \dot{\alpha} p_{01}^{(2)} + \ddot{\alpha} p_{02}^{(2)},$$

where

$$\left. \begin{aligned} L \left\{ p_{00}^{(2)} \right\} &= f_{00}^{(2)} = \frac{\partial}{\partial \theta} (h p_{00}^{(1)}) - p_{00}^{(1)} f_{00}^{(1)} - M(p_{00}^{(1)}, p_{00}^{(1)}) \\ &= h \frac{\partial p_{00}^{(1)}}{\partial \theta} - h^3 \left[ \left( \frac{\partial p_{00}^{(1)}}{\partial \theta} \right)^2 + \left( \frac{\partial p_{00}^{(1)}}{\partial z} \right)^2 \right], \end{aligned} \right\} \quad (20)$$

$$\begin{aligned} L \left\{ p_{10}^{(2)} \right\} &= f_{10}^{(2)} = \frac{\partial}{\partial \theta} (h p_{10}^{(1)}) + 2 \frac{\partial}{\partial \epsilon} (h p_{00}^{(1)}) - p_{00}^{(1)} f_{10}^{(1)} \\ &\quad - p_{10}^{(1)} f_{00}^{(1)} - 2M(p_{00}^{(1)}, p_{10}^{(1)}), \end{aligned} \quad (21)$$

$$L \left\{ p_{20}^{(2)} \right\} = f_{20}^{(2)} = 2h p_{10}^{(1)} \quad (22)$$

$$\begin{aligned} L \left\{ p_{01}^{(2)} \right\} &= f_{01}^{(2)} = \frac{\partial}{\partial \theta} (h p_{01}^{(1)}) + 2 \frac{\partial}{\partial \alpha} (h p_{00}^{(1)}) - p_{00}^{(1)} f_{01}^{(1)} \\ &\quad - p_{01}^{(1)} f_{00}^{(1)} - 2M(p_{00}^{(1)}, p_{01}^{(1)}), \end{aligned} \quad (23)$$

$$L \left\{ p_{02}^{(2)} \right\} = f_{02}^{(2)} = 2h p_{01}^{(1)}, \quad (24)$$

and

$$\begin{aligned}
 L \left\{ \frac{\partial p_{00}^{(2)}}{\partial \epsilon} \right\} = f_{\epsilon}^{(2)} = \frac{\partial f_{00}^{(2)}}{\partial \epsilon} - 3 \left[ \frac{1}{h} f_{00}^{(2)} - h \frac{\partial h}{\partial \theta} \frac{\partial p_{00}^{(2)}}{\partial \theta} \right] \frac{\partial h}{\partial \epsilon} \\
 - 3h^2 \frac{\partial p_{00}^{(2)}}{\partial \theta} \frac{\partial^2 h}{\partial \epsilon \partial \theta}, \quad (25)
 \end{aligned}$$

$$\begin{aligned}
 L \left\{ \frac{\partial p_{00}^{(2)}}{\partial \alpha} \right\} = f_{\alpha}^{(2)} = \frac{\partial f_{00}^{(2)}}{\partial \alpha} - 3 \left[ \frac{1}{h} f_{00}^{(2)} - h \frac{\partial h}{\partial \theta} \frac{\partial p_{00}^{(2)}}{\partial \theta} \right] \frac{\partial h}{\partial \alpha} \\
 - 3h^2 \frac{\partial p_{00}^{(2)}}{\partial \theta} \frac{\partial^2 h}{\partial \alpha \partial \theta} \quad (26)
 \end{aligned}$$

### III. SOLUTION BY GALERKIN'S METHOD

In the present report, we outline briefly the steps followed in solving our equations by Galerkin's method. This method is equivalent to the Rayligny-Ritz procedure in any problem where a minimum principle applies, as in this case. A complete discussion is given in [2].

We consider the partial differential equation

$$L \{u\} = \frac{\partial}{\partial \theta} (h^3 \frac{\partial u}{\partial \theta}) + \frac{\partial}{\partial z} (h^3 \frac{\partial u}{\partial z}) = f(\theta, z). \quad (27)$$

We assume that (See Figure 1.)

$$h = 1 - \epsilon \cos(\theta - \alpha). \quad (28)$$

As boundary conditions, we have

$$u(\pm \frac{\beta}{2}, z) = u(\theta, \pm \frac{L}{D}) = 0. \quad (29)$$

From the above it follows that  $u$  is an even function of  $z$ , i.e.,

$$f(\theta, z) = f(\theta, -z) \quad (30)$$

We assume an approximate solution  $\bar{u}(\theta, z)$  of the form

$$\bar{u}(\theta, z) = \sum_{n=1}^N Z_n(z) \sum_{m=1}^M c_{mn} \Theta_m(\theta), \quad (31)$$

where the functions  $Z_n(z)$  and  $\Theta_m(\theta)$  are linearly independent elements of a complete set (i.e., a set complete in the sense of the Weierstrass approximation theorem [3], and satisfy the

boundary conditions (29). In our case, we choose

$$Z_n(z) = \cos \left[ \frac{(2n-1)}{2} \frac{\pi D}{L} z \right],$$

$$\Theta_m(\theta) = \sin \left[ \frac{m\pi}{\beta} \theta + \frac{m\pi}{2} \right]. \quad (32)$$

The  $c_{mn}$  are undetermined coefficients.

Then, following the procedure outlined in [2], we determine the coefficients  $c_{mn}$  from

$$2 \int_{\beta/2}^{\beta/2} \int_0^{L/D} \left[ L \left\{ \bar{u} \right\} - f \right] Z_\nu(z) \Theta_\mu(\theta) dz d\theta = 0, \quad (33a)$$

for  $\nu = 1, 2, \dots, N$ ;  $\mu = 1, 2, \dots, M$ . Or,

$$\sum_{n=1}^N \sum_{m=1}^M \int_{-\beta/2}^{\beta/2} \int_0^{L/D} \left[ Z_n \frac{d}{d\theta} \left( h^3 \frac{d\Theta_m}{d\theta} \right) + h^3 \Theta_m \frac{d^2 Z_n}{dz^2} \right] Z_\nu \Theta_\mu dz d\theta =$$

$$= \int_{\beta/2}^{\beta/2} \Theta_\mu \int_0^{L/D} f(\theta, z) Z_\nu dz d\theta, \quad (33b)$$

for  $\nu = 1, 2, \dots, N$ ;  $\mu = 1, 2, \dots, M$ .

Ordinarily, to obtain the coefficients  $c_{mn}$ , we would have to invert a matrix of order  $MN \times MN$ . However, with our choice of  $Z_n(z)$  and the assumption on  $h$  (Eq. 28), the orthogonality of the cosine functions requires that  $n = \nu$ , and (33b) becomes partially uncoupled. Therefore, we have instead  $N$  matrices each of order  $M \times M$  to invert.

In the preceding section, we derived the forcing terms  $f$  corresponding to each pressure component and the steady state pressure derivatives with respect to  $\epsilon$  and  $\alpha$ . We now correspond to each of these a set of coefficient matrices:

$$f_{rs}^{(k)} \longleftrightarrow p_{rs}^{(k)} = \sum_{n=1}^N \sum_{m=1}^M c_{mn}^{(k)} \Theta_m(\theta) Z_n(z), \quad (34a)$$

$$f_{\epsilon}^{(k)} \longleftrightarrow \frac{\partial p_{00}^{(k)}}{\partial \epsilon} = \sum_{n=1}^N \sum_{m=1}^M c_{mn}^{(k)} \Theta_m(\theta) Z_n(z), \quad (34b)$$

$$f_{\alpha}^{(k)} \leftrightarrow \frac{\partial p_{00}^{(k)}}{\partial \alpha} = \sum_{n=1}^N \sum_{m=1}^M c_{mn}^{(k)} \Theta_m(\theta) z_n(z). \quad (34c)$$

The uncoupling in  $z$  described above permits us to write the systems to be inverted as follows, for each value of  $n$  ( $n=1, 2, \dots, N$ ):

$$\sum_{m=1}^M c_{mn}^{(k)} A_{\mu m; n} = \Phi_{\mu n}^{(k)} = -\frac{2\pi D}{\beta L} \int_{-\beta/2}^{\beta/2} \Theta_{\mu} \int_0^{L/D} f_{rs}^{(k)} z_n dz d\theta; \quad \mu = 1, 2, \dots, M, \quad (35a)$$

$$\sum_{m=1}^M c_{mn}^{(k)} A_{\mu m; n} = \Phi_{\mu n}^{(k)} = -\frac{2\pi D}{\beta L} \int_{-\beta/2}^{\beta/2} \Theta_{\mu} \int_0^{L/D} f_{\epsilon}^{(k)} z_n dz d\theta; \quad \mu = 1, 2, \dots, M, \quad (35b)$$

$$\sum_{m=1}^M c_{mn}^{(k)} A_{\mu m; n} = \Phi_{\mu n}^{(k)} = -\frac{2\pi D}{\beta L} \int_{-\beta/2}^{\beta/2} \Theta_{\mu} \int_0^{L/D} f_{\epsilon}^{(k)} z_n dz d\theta; \quad \mu = 1, 2, \dots, M. \quad (35c)$$

In each of the above, the elements of the matrices  $A_{\mu m; n}$  are identical, and are given by

$$A_{\mu m; n} = \begin{cases} a_0 (\kappa_m^2 + \lambda_n^2) + \kappa_m^2 \sum_{j=1}^3 \left\{ a_j \cos j\alpha \left[ 1 - \frac{2(\kappa_m^2 + \lambda_n^2)}{j^2} \right] \times \right. \\ \left. \times \left[ \frac{\sin(j\beta/2)}{(\frac{j\beta}{\pi})^2 - 4m^2} \right] \right\}, & m = \mu \\ -m\mu \sum_{j=1}^3 \left\{ a_j \sin j\alpha \left[ \kappa_m^2 + \kappa_{\mu}^2 + 2\lambda_n^2 - j^2 \right] \left[ \frac{\cos(j\beta/2)}{[\frac{j\beta}{\pi}]^2 - m^2 - \mu^2} \right]^2 - (2m\mu)^2 \right\}, & m \neq \mu \\ & m + \mu \text{ odd} \\ -m\mu \sum_{j=1}^3 \left\{ a_j \cos j\alpha \left[ \kappa_m^2 + \kappa_{\mu}^2 + 2\lambda_n^2 - j^2 \right] \left[ \frac{\sin(j\beta/2)}{[\frac{j\beta}{\pi}]^2 - m^2 - \mu^2} \right]^2 - (2m\mu)^2 \right\}, & m \neq \mu \\ & m + \mu \text{ even} \end{cases} \quad (36)$$

where

$$a_0 = \frac{\pi}{2} \left(1 + \frac{3}{2} \epsilon^2\right),$$

$$a_1 = -\frac{6\beta}{\pi} \epsilon \left(1 + \frac{\epsilon^2}{4}\right),$$

$$a_2 = -\frac{6\beta}{\pi} \epsilon^2,$$

$$a_3 = -\frac{3}{2} \frac{\beta}{\pi} \epsilon^3,$$

$$\kappa_m = m\pi/\beta,$$

$$\lambda_n = \left(\frac{2n-1}{2}\right) \frac{\pi D}{L}.$$

Note that the  $A_{\mu m; n}$  matrices are symmetric in  $\mu$  and  $m$ . They also contain some removable singularities. The limiting values of terms in (36) are given as follows:

$$\left. \begin{aligned} \lim_{x \rightarrow 2m} \left\{ \frac{\sin(\pi x/2)}{x^2 - 4m^2} \right\} &= \frac{(-)^m \pi}{8m}; \quad \mu = m \\ \lim_{x \rightarrow |\mu \pm m|} \left\{ \frac{\cos(\pi x/2)}{x^2 - m^2 - \mu^2 - (2m\mu)^2} \right\} &= \mp \frac{\pi \sin\left[\frac{\pi}{2} |\mu \pm m|\right]}{16 \mu m |\mu \pm m|}; \quad \left\{ \begin{array}{l} \mu > m \\ \mu + m \text{ odd} \end{array} \right\} \\ \lim_{x \rightarrow |\mu \pm m|} \left\{ \frac{\sin(\pi x/2)}{(x^2 - m^2 - \mu^2)^2 - (2m\mu)^2} \right\} &= \pm \frac{\pi \cos\left[\frac{\pi}{2} |\mu \pm m|\right]}{16 \mu m |\mu \pm m|}; \quad \left\{ \begin{array}{l} \mu > m \\ \mu + m \text{ even} \end{array} \right\} \end{aligned} \right\} \quad (37)$$

The computational procedure to obtain pressure is then as follows:

1. Calculate the  $A_{\mu m; n}$  matrices from (36) and invert them.
2. For the appropriate pressure component obtain the forcing term from Eqs. (9), (14)-(17). These are given in more detail for  $k = 1, 2$  in Eqs. (9), (18)-(26) on pages
3. Obtain the matrix of  $\Phi_n$  vectors from Eqs. (35).
4. Obtain the coefficients  $c_{mn}$  by multiplying the  $\Phi_n$  vectors by the corresponding inverses of the  $A_{\mu m; n}$  matrices.
5. The pressure component is then found using Eqs. (34), (8) and (2).

#### IV. CALCULATION OF FORCES

The dimensionless forces along and perpendicular to the line of centers are denoted  $F_R$  and  $F_T$  respectively, and are given by

$$F_R = 2 \int_{-\beta/2}^{\beta/2} \cos(\theta - \alpha) \int_0^{L/D} p \, dz \, d\theta, \quad (38a)$$

$$F_T = -2 \int_{-\beta/2}^{\beta/2} \sin(\theta - \alpha) \int_0^{L/D} p \, dz \, d\theta, \quad (38b)$$

Where  $p$  is the pressure component or its derivative with respect to  $e$  or  $\alpha$ . Substituting the appropriate summation

$$p = \sum_{n=1}^N \sum_{m=1}^M c_{mn} \Theta_m z_n$$

in (38), we may then integrate directly to obtain

$$F_R = \frac{8}{\pi} \frac{L}{D} \frac{\beta}{\pi} \left\{ \sum_{n=1}^N \frac{(-)^n}{2n-1} \sum_{m=1}^M c_{mn} \left[ \frac{m}{m^2 - (\beta/\pi)^2} \right] \times \right. \\ \left. \times \begin{bmatrix} -\cos \frac{\beta}{2} \cos \alpha, & (m \text{ odd}) \\ \sin \frac{\beta}{2} \sin \alpha, & (m \text{ even}) \end{bmatrix} \right\}, \quad (39a)$$

$$F_T = \frac{-8}{\pi} \frac{L}{D} \frac{\beta}{\pi} \left\{ \sum_{n=1}^N \frac{(-)^n}{2n-1} \sum_{m=1}^M c_{mn} \left[ \frac{m}{m^2 - \beta/\pi)^2} \right] \times \right. \\ \left. \times \begin{bmatrix} \cos(\beta/2) \sin \alpha, & (m \text{ odd}) \\ \sin(\beta/2) \cos \alpha, & (m \text{ even}) \end{bmatrix} \right\}. \quad (39b)$$

## V. EXTRAPOLATION PROCEDURE

By use of Richardson's extrapolation procedure (see e.g. [4]), and Tanner's use \* of extrapolation in [1], we may use results computed with different values of M and/or N to obtain a closer approximation to the true solution. We will assume that the z dependence of our solution can be obtained with very few functions  $Z_n$ . Henceforth, we consider N fixed. Then, if we use two values of M, we obtain the extrapolation formula

$$F = (M_2^2 E_2 - M_1^2 E_1) / (M_2^2 - M_1^2), \quad (40)$$

where

$F$  = extrapolated result,

$E_i$  = computed result for  $M = M_i$ ;  $i = 1, 2$ .

It is of interest to include a short discussion of error growth in the calculation of  $f^{(k)}$  for successive values of  $k$ . We assume truncation error per calculation fixed. (That is, we assume M and N are fixed. Obviously, the greater M and N to begin with, the lower the truncation error, from the Weierstrass theorem). Thus, for a given  $k$ , we have

$$p_*^{(k)} = p^{(k)} + \epsilon^{(k)},$$

where

$p_*^{(k)}$  = calculated pressure at the  $k^{\text{th}}$  stage of computation,

$p^{(k)}$  = true pressure at the  $k^{\text{th}}$  stage,

$\epsilon^{(k)}$  = error at the  $k^{\text{th}}$  stage.

To calculate  $f^{(k+1)}$  requires derivatives of  $p^{(k)}$ . But, in [2], it is shown that the errors in the first derivatives of the solution function are of the same order as those in the solution

---

\* In [1], Tanner used a three-term extrapolation, wherein the first term obviously was not good. If he had used his two better approximate values in an extrapolation of the form (40) above, his results would have been much closer to those he used as a standard.

function itself. Thus, it can be seen that while error does increase with  $k$ , the process is essentially stable in that all errors in the  $(k + 1)$  stage are of order  $\epsilon^{(k)}$ , and therefore, higher values of  $k$  can be computed if the initial truncation errors are kept low.

## VI. SAMPLE RESULTS

A digital computer program has been written to perform the calculations indicated above for  $k = 1$ . Currently being checked out is a subroutine to extend these results to the case  $k = 2$ .

Some computer program results are given herein. The physical inputs were as follows:

Shoe angle  $\beta = 120^\circ$

Angle of line of centers  $\alpha = 60^\circ$

$L/D = 1.0$

Eccentricity ration  $\epsilon = 0.01, 0.8$

Results were computed with  $N = 2$ , and with two values of  $M$ : 4 and 6.

A tabulation follows:

Force Component	$\epsilon = 0.01$			$\epsilon = 0.8$		
	M			M		
	4	6	(Extrapolation)	4	6	(Extrapolation)
$F_{R00}^{(1)} = -\frac{1}{2} F_{R01}^{(1)}$	0.00187	0.00187	0.00187	1.367	1.490	1.589
$F_{T00}^{(1)} = -\frac{1}{2} F_{T01}^{(1)}$	0.00384	0.00384	0.00384	1.111	1.140	1.164
$F_{R10}^{(1)}$	0.3453	0.3467	0.3479	5.533	6.865	7.931
$F_{T10}^{(1)}$	0.3732	0.3730	0.3728	3.417	3.726	3.973
$\frac{\partial}{\partial \epsilon} F_{R00}^{(1)}$	0.1899	0.1898	0.1897	9.397	11.081	12.428
$\frac{\partial}{\partial \epsilon} F_{T00}^{(1)}$	0.3869	0.3874	0.3878	5.569	5.859	6.091
$\frac{\partial}{\partial \alpha} F_{R00}^{(1)}$	0.00169	0.00170	0.00171	-2.030	-1.693	-1.423
$\frac{\partial}{\partial \alpha} F_{T00}^{(1)}$	0.00178	0.00177	0.00176	-1.861	-1.807	-1.764

A plot of the steady state forces and pressure profile is given as Figure 1. The above results have been compared with those obtained in [5], and good agreement was found.

## CONCLUSIONS

1. The approach described herein provides a fast, inexpensive, accurate method of obtaining partial arc and pivoted shoe bearing data.
2. It operates over a wide range of conditions (including high values of  $\epsilon$ ), over which difficulty is encountered in other (e.g., iterative) approaches.
3. The expressions given in the present report include compressibility effects of all orders (i.e., powers of  $\Lambda$ ). The computer program can be extended to obtain these higher order effects.

## RECOMMENDATIONS

### A. Computer Program

It is recommended that:

1. The computer program be extended to include second-order effects ( $k = 2$ ).
2. The program be modified so that Richardson's extrapolation procedure is performed automatically by the computer.
3. Programming be included so as to perform numerical quadratures for higher compressibility effects (values of  $k$ ), since analytical procedures are not practical.

### B. Applications

1. The computer program should be used to generate design charts for partial arc gas bearings at high ambients to check and supplement presently available data.
2. The dynamic force derivatives calculated by this computer program can be incorporated into rotor dynamics analysis to study critical speeds and frequency response.
3. The static and dynamic force derivatives can be used to calculate the threshold speed of instability of rotors supported in partial arc bearings.
4. This computer program can be used as a subroutine in a larger program to study static and dynamic characteristics of multi-lobe and pivoted shoe bearings.

**VII. REFERENCES**

1. R. I. Tanner, "The Estimation of Bearing Loads Using Galerkin's Method," Int. J. Mech. Sci., Vol. 3 (1961), pp. 13-27.
2. L. V. Kantorovich and V. I. Krylov (translated by C. D. Benster), Approximate Methods of Higher Analysis, Noordhoff, Groningen, (1958).
3. R. Courant and D. Hilbert, Methods of Mathematical Physics, pp. 65-69, Interscience, New York. (1953).
4. F. B. Hildebrand, Introduction to Numerical Analysis, McGraw-Hill, New York (1956).
5. P. C. Warner, "Static and Dynamic Properties of Partial Journal Bearings", (To appear in Trans. A.S.M.E., Series D, Journal of Basic Engineering).
6. W. A. Gross and E. C. Zachmanoglou, "Perturbation Solutions for Gas-Lubricating Films," Trans. A.S.M.E., Series D, Journal of Basic Engineering, Vol. 83 (1961), pp. 139-144.
7. J. W. Lund and B. Sternlicht, "Rotor-Bearing Dynamics with Emphasis on Attenuation", Trans. A.S.M.E., Series D, Journal of Basic Engineering, Vol. 83 (1962) pp. 491-502.

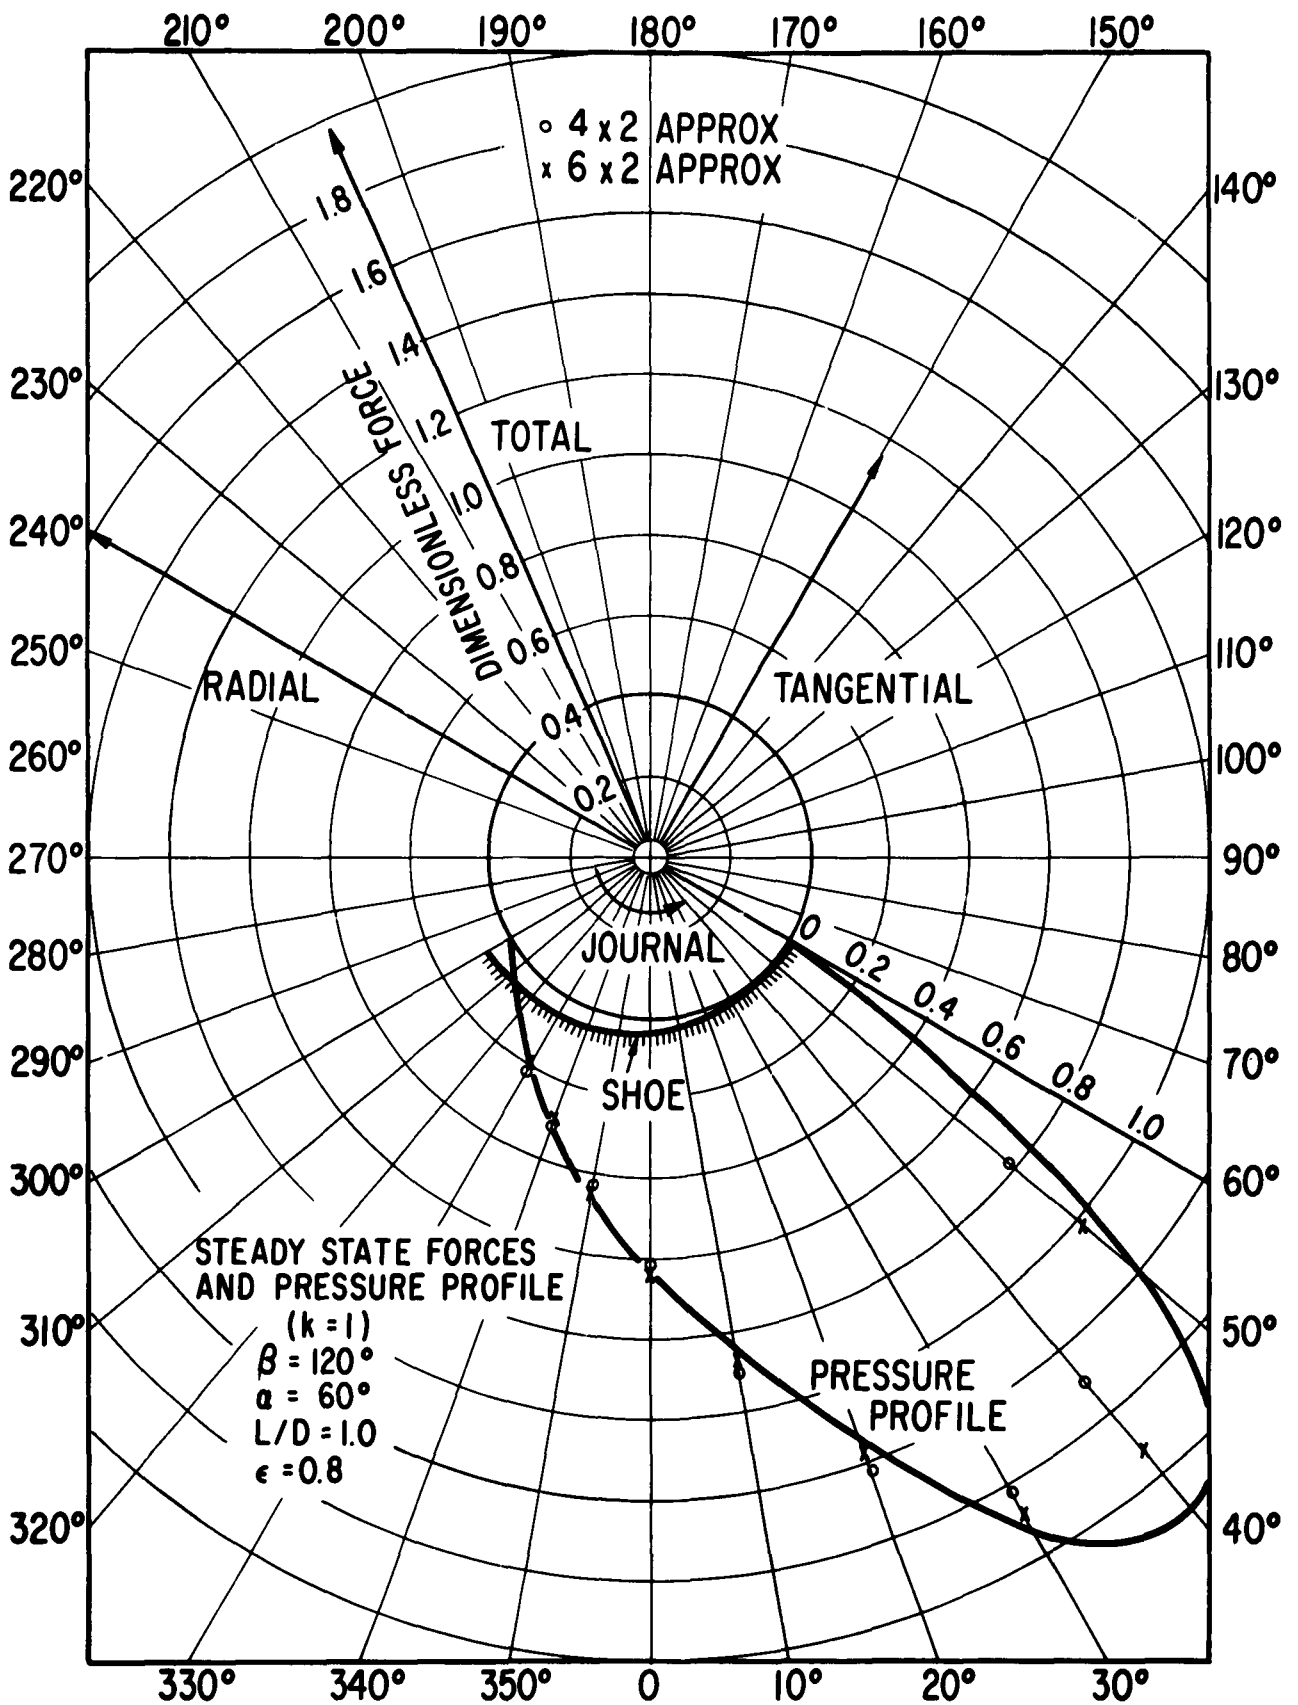


FIGURE I  
 EXTRAPOLATED FORCES AND PRESSURE PROFILE

**APPROVED DISTRIBUTION LISTS FOR UNCLASSIFIED TECHNICAL REPORTS  
ISSUED UNDER  
GAS LUBRICATED BEARINGS CONTRACTS**

**Page 2**

Chief of Naval Research Department of the Navy Washington 25, D. C. Attn: Code 438 429 466	3 1	Director Naval Research Laboratory Washington 25, D. C. Attn: Code 2000 5230	6 1	Chief of Research and Development Office, Chief of Staff Department of the Army Pentagon Building Washington 25, D. C.	1	Office of Assistant Director (Army Reactors) Division of Reactor Development U. S. Atomic Energy Commission Washington 25, D. C. Attn: Mr. Clarence E. Miller, Jr.	2
Commanding Officer Office of Naval Research Branch Office Tenth Floor The John Crerar Library Bldg. 86 East Randolph Street Chicago, Illinois	1	Special Projects Office Department of the Navy Washington 25, D. C. Attn: Code SP23-A (D. Gold)	1	Commanding General U. S. Army Engineer R&D Laboratories Fort Belvoir, Virginia Attn: W. M. Crim, Nuclear Power Field Office	2	Chief Engineering Development Branch Reactor Development Division U. S. Atomic Energy Commission Washington 25, D. C.	1
Commanding Officer Office of Naval Research Branch Office 346 Broadway New York 13, New York	1	Head, Bearings and Seals Branch U. S. Naval Engineering Experiment Station Annapolis, Maryland Attn: Code 851 (Watt V. Smith)	1	Commander Army Rocket & Guided Missile Agency Redstone Arsenal, Alabama Attn: Technical Library	1	Headquarters Library U. S. Atomic Energy Commission Washington, D. C.	1
Commanding Officer Office of Naval Research Branch Office Box 39, Navy #100 Fleet Post Office New York, New York	1	Material Laboratory Library Building 291, Code 912B New York Naval Shipyard Brooklyn 1, New York	1	Chief of Staff, U. S. Air Force The Pentagon Washington 25, D. C. Attn: AFRDR-AS/M	1	Chief, Division of Engineering Maritime Administration GAO Building Washington 25, D. C.	1
Commanding Officer Office of Naval Research Branch Office 1030 East Green Street Pasadena 1, California	1	Library Technical Reports Section U. S. Naval Postgraduate School Monterey, California	1	ESD - AROD Box CM, Duke Station Durham, North Carolina	1	Cryogenic Engineering Laboratory National Bureau of Standards Boulder, Colorado Attn: Library	1
Commanding Officer Office of Naval Research Branch Office 1000 Geary Street San Francisco 9, California	1	Commanding Officer U. S. Naval Avionics Facility Indianapolis 18, Indiana Attn: J. G. Weir	1	ASRMD, P. C. Hanlon ASRMFP-1, B. L. McFadden, Jr. ASRMGO-1, R. W. McAdony	2 1 1	Mr. Harold Hensing National Aeronautics and Space Administration 1512 H. Street, N. W. Washington, D. C.	
Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Code 644B (James C. Reid, Jr.)	1	Director U. S. Naval Boiler and Turbine Lab. Naval Base Philadelphia 12, Pennsylvania	1	Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia	10	Mr. Edmund E. Blisson Chief, Lubrication & Wear Branch Lewis Research Center National Aeronautics and Space Administration 2100 Brookpark Road Cleveland, Ohio	1
Chief, Bureau of Naval Weapons Department of the Navy Washington 25, D. C. Attn: Code RAAE-3431 (G. D. Norman)	1	Office of Chief of Ordnance Research and Development Division Department of the Army Washington 25, D. C. Attn: Norman L. Klein	1	ASRMD, P. C. Hanlon ASRMFP-1, B. L. McFadden, Jr. ASRMGO-1, R. W. McAdony	2 1 1	Mr. Rudolph E. Beyer George C. Marshall Space Flight Center National Aeronautics and Space Administration Guidance and Control Division Gyro-Stabilizer Branch Huntsville, Alabama	
		Fuels & Lubricants Section Research Branch Research & Development Division Office, Chief of Ordnance Attn: Mr. Ronald E. Streets	1			Mr. H. W. Savage Oak Ridge National Laboratory Post Office Box Y Oak Ridge, Tennessee	
		4th Floor, Pentagon Annex #2 Washington 25, D. C.	1				

**Page 4**

Chief, Technical Information Service Extension P. O. Box 62 Oak Ridge, Tennessee Attn: Melvin S. Day	1	Engineering Projects Laboratory Massachusetts Institute of Technology Cambridge 39, Massachusetts Attn: Dr. R. W. Mann (Room 3-459 A)	1	AirResearch Manufacturing Company Sky Harbor Airport 402 South 36th Street Phoenix, Arizona Attn: Mr. VanDeveneg Librarian	1	Bendix Aviation Corporation Research Laboratories Division Bouthfield, Michigan Attn: Mr. Ralph H. Larson	1
Applied Physics Laboratory Johns Hopkins University Silver Spring, Maryland Attn: George L. Seidelstad, Supr., Tech., Reports Group	1	Massachusetts Institute of Technology Instrumentation Laboratory 68 Albany Street Cambridge 39, Massachusetts Attn: Library, W1-109	1	Mr. William D. Stimmel Research Laboratories Library Allis-Chalmers Manufacturing Company Milwaukee 1, Wisconsin	1	Mr. C. R. Adams Physics Technology Department Aero-Space Division The Boeing Company Seattle 24, Washington	1
Department of Chemical Engineering New York University New York 53, New York Attn: James J. Barker, Assoc., Prof. of Nuclear Engineering	1	Professor F. F. Martinuzzi Stevens Institute of Technology Hoboken, New Jersey	1	J. W. Facker Division American Optical Company 4709 Baum Blvd. Pittsburgh 13, Pennsylvania	1	Bryant Chucking Grinder Company 60 Clinton Avenue Springfield, Vermont Attn: Mr. Roald Cann	1
Professor A. Charnes The Technological Institute Northwestern University Evanston, Illinois	1	Battelle Memorial Institute 505 King Avenue Columbus 1, Ohio Attn: Dr. Russell Dayton	1	American Society of Lubrication Engineers 5 North Wabash Avenue Chicago 2, Illinois	1	Cadillac Gage Company P. O. Box 3806 Detroit 5, Michigan Attn: Mr. J. Taylor, Project Engineer	1
Resident Representative Office of Naval Research c/o University of Pennsylvania 3438 Walnut Street Philadelphia 4, Pennsylvania	1	Franklin Institute Laboratory for Research and Development Philadelphia, Pennsylvania Attn: Professor D. D. Fuller	3	Chairman Research Committee on Lubrication The American Society of Mechanical Engineers United Engineering Center 345 East 47th Street New York 17, New York	1	Dr. Deway J. Sandell Director of Development Carrier Research and Development Co. Carrier Parkway Syracuse, New York	1
Professor P. R. Trumpler Towne School of Civil and Mechanical Engineering University of Pennsylvania Philadelphia, Pennsylvania	1	Library Institute of Aerospace Sciences 2 East 64th Street New York, New York	1	Mr. James R. Kerr, President Lycoming Division AVCO Stratford, Connecticut	1	Chance Vought Corporation P. O. Box 5907 Dallas, Texas Attn: Mr. R. C. Blaylock Vice President, (Engineering)	1
Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Avenue Pasadena, California Attn: Library	1	Mr. G. B. Speen Sr. Member, Technical Staff ITT Federal Laboratories Division of International Telephone and Telegraph Corporation 15151 Bledsoe Street San Fernando, California	1	Research Precision Mechanisms Division of the Barden Corporation 4 Old Newtown Road Danbury, Connecticut Attn: B. L. Mims, Vice President - General Manager	1	Chrysler Corporation Defense Operations P. O. Box 757 Detroit 31, Michigan Attn: Mr. C. W. Snider	1
Illinois Institute of Technology Chicago 16, Illinois Attn: Professor L. N. Tao	1	Aerojet-General Nucleonics P. O. Box 86 San Ramon, California Attn: Barbara M. Probert	1	Boomer Engineering Company Industrial Park Fort Washington, Pennsylvania	1	J. D. Mamarchev & Associates Consulting Engineers 3908 Main Street Houston 2, Texas	1
Professor M. C. Shaw, Head Department of Mechanical Engineering Carnegie Institute of Technology Pittsburgh 13, Pennsylvania	1	Aerospace Corporation P. O. Box 95085 Los Angeles 45, California Attn: Aerospace Library Technical Reports Group	1 1	Utica Division The Bendix Corporation 211 Seward Avenue Utica, New York Attn: Mr. Russell T. DeMuth Supervisory Engineer	1	Mr. B. W. Birmingham Cryogenic Engineering Laboratory National Bureau of Standards Boulder, Colorado	1
						Curtiss Wright Corporation Wright Aeronautical Division Department 8332 Wood Ridge, New Jersey Attn: W. J. Dwyer Chief Project Engineering	

Page 5

Daystrom Pacific  
9320 Lincoln Boulevard  
Los Angeles 45, California  
Attn: Robert H. Smith  
Special Project Engineer 1

Ford Instrument Company  
31-10 Thomson Avenue  
Long Island City 1, New York  
Attn: Mr. Jarvis 1

Mr. Adolf Egli  
Ford Motor Company  
Engineering and Research Staff  
P. O. Box 2053  
Dearborn, Michigan 1

Dr. John E. Mayer, Jr.  
Non-Metallics Section  
Applied Science Department  
Scientific Laboratory  
Ford Motor Company  
P. O. Box 2053  
Dearborn, Michigan 1

AIResearch Manufacturing Division  
The Garrett Corporation  
9851 S. Sepulveda Boulevard  
Los Angeles, California  
Attn: Jerry Glaser, Supervisor  
Mechanical Lab.-Dept. 93-17 1

General Atomic Division  
General Dynamics Corporation  
P. O. Box 608  
San Diego 12, California  
Attn: Mr. F. W. Simpson 1

Bearing and Lubricant Center  
General Engineering Laboratory  
General Electric Company  
1 River Road  
Schenectady, New York  
Attn: G. R. Fox, Manager 1

Mr. L. W. Winn  
General Electric Company  
Aircraft Accessory Turbine Department  
950 Western Avenue, Bldg. 3-74  
Lynn, Massachusetts 1

Research Laboratories  
General Motors Corporation  
General Motors Technical Center  
12 Mile and Mound Roads  
Warren, Michigan  
Attn: Mr. E. Roland Maki,  
Mechanical Development Dept. 1

A. C. Spark Plug Division  
General Motors Corporation  
Milwaukee 1, Wisconsin  
Attn: Allen Knudsen 1

Mr. Walter Carow  
Kearfott Division  
General Precision Inc.  
1150 McBride Avenue  
Little Falls, New Jersey 1

Grumman Aircraft Engineering Corp.  
Bethpage, Long Island, New York  
Attn: Mr. David W. Craig, Jr.  
Mechanical Design Section  
Engineering Department 1

Hydronautics, Incorporated  
200 Monroe Street  
Rockville, Maryland 1

International Business Machine Corp.  
Research Laboratory  
San Jose, California  
Attn: Dr. W. E. Langlois 2

Mr. B. A. Napier, Engr. Div. Mgr.  
Lear, Incorporated  
110 Ionia Avenue NW  
Grand Rapids, Michigan 1

Mr. L. R. Barr, V. P.  
Lear-Romec Division  
Abbe Road  
Elyria, Ohio 1

Dr. Calus G. Goetsel, D/53-30  
Bldg. 201, Plant 2, Palo Alto  
Lockhead Missiles & Space Co.  
P. O. Box 504  
Sunnyvale, California 1

Page 6

Dr. J. S. Ausman  
Litton Systems, Inc.  
5500 Canoga Avenue  
Woodland Hills, California 1

Mr. Don Moore  
Litton Systems  
5500 Canoga Avenue  
Woodland Hills, California

Mr. A. N. Thomas  
Astro Division  
The Marquardt Corporation  
16355 Saticoy Street  
Van Nuys, California 1

Mr. Kendall Perkins  
Vice President (Engr)  
McDonnell Aircraft Corporation  
Lambert St. - St. Louis  
Municipal Airport  
Box 516  
St. Louis 3, Missouri 1

Dr. Beno Sternlicht  
Mechanical Technology Incorporated  
968 Albany-Shaker Road  
Latham, New York 1

Mr. J. W. Lower  
Chief, Engineer-Inertial Components  
Honeywell Aero Division  
2600 Ridgway Road  
Minneapolis, Minnesota 1

Mr. Carl F. Graesser, Jr.  
Director of Research  
New Hampshire Ball Bearings, Inc.  
Peterborough, New Hampshire 1

Mrs. Alice Ward, Librarian  
Norden Division of United Aircraft Corp.  
Helen Street  
Norwalk, Connecticut 1

Autonetics Division (Librarian)  
North American Aviation Inc.  
9150 East Imperial Highway  
Downey, California 1

Northrop Corporation  
Norair Division  
1001 East Broadway  
Hawthorne, California  
Attn: Technical Information, 3125 1

Mr. N. L. Simmons  
Mortronics  
A Division of Northrop Corp.  
500 East Orangeforth Avenue  
Anaheim, California 1

Mortronics  
A Division of Northrop Corporation  
100 Morse Street  
Norwood, Massachusetts  
Attn: Mr. E. L. Swainson, Tech. Asst.  
Precision Products Department 1

Pratt & Whitney Aircraft  
Division of UAC - CANEL  
P. O. Box 611  
Middletown, Connecticut  
Attn: Librarian 1

Library, Bldg. 10-2-5  
Radio Corporation of America  
Camden 2, New Jersey 1

Mr. Robert S. Siegler  
Rocketdyne  
Nucleonics Subdivision  
6633 Canoga Avenue  
Canoga Park, California 2

Ryan Aeronautical Company  
Attn: Engineering Library  
Lindbergh Field  
San Diego 12, California 1

Jack & Heintz, A Division of  
The Siegler Corporation  
1725 Eye Street, Suite 505  
Washington 6, D. C. 1

Mr. Paul A. Pitt, Vice President  
Engineering & Research  
Solar Aircraft Company  
2200 Pacific Highway  
San Diego 12, California 1

Mr. W. G. Wing  
Sperry Gyroscope Company  
C-2  
Great Neck, New York 1

E. A. Babley  
Union Carbide Nuclear Company  
Post Office Box P  
Oak Ridge, Tennessee 1

Page 7

Mrs. Florence Turnbull  
Engineering Librarian  
Sperry Gyroscope Company  
Great Neck, New York 1

Sundstrand Aviation-Denver  
2480 West 70th Avenue  
Denver 21, Colorado 1

Mr. James W. Salassi, President  
Turbocraft, Inc.  
1946 S. Myrtle Avenue  
Monrovia, California 1

Universal Match Corporation  
Avionics Department Technical Library  
4407 Cook Avenue  
St. Louis 13, Missouri 1

Waukesha Bearings Corporation  
P. O. Box 346  
Waukesha, Wisconsin  
Attn: Mr. J. M. Gruber, Ch. Engr. 1

Mr. John Boyd  
Westinghouse Electric Corporation  
Research Laboratories  
East Pittsburgh, Pennsylvania 1

Mr. H. Walter  
Director of Research  
Worthington Corporation  
Harrison, New Jersey 1

Dr. W. A. Cross  
Ampex Corporation  
934 Charter Blvd.  
Redwood City, California 2

Professor J. Modrey  
Department of Mechanical Engineering  
Union College  
Schenectady 8, New York 1